

## 2AA PROPOLYMER® HAZ-LO® INTRINSICALLY SAFE ALKALINE FLASHLIGHT

**MARKET**

**APPLICATIONS:** Industrial, Occupational Safety, Fire & Rescue, Sporting Goods, Law Enforcement, Security, Hardware/Tool, Consumer

**DESCRIPTION:** The 2AA ProPolymer® HAZ-LO® is an extremely durable, waterproof alkaline battery-powered intrinsically safe flashlight. This light offers a push-button tailswitch for momentary on/off operation. Div 1 model available in black or yellow. ATEX model available in orange and yellow.

**CASE MATERIAL:** Body: Impact resistant Engineering polymer.  
Facecap: Impact resistant Engineering polymer overmolded onto polycarbonate lens.

**DIMENSIONS:** Length: 6.40 in. (16.26 cm) Major Diameter: 1.32 in. (3.35 cm) Body Diameter: 0.89 in. (2.26 cm)

**WEIGHT:** 3.6 oz (100 grams) with batteries (included in purchase).

**LENS:** Unbreakable polycarbonate with scratch-resistant coating.

**LIGHT SOURCE:** C4® LED technology, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:** 65 lumens, 2,300 candela peak beam intensity and 96 meter beam distance.  
Smooth parabolic reflector produces a tight beam with optimal peripheral illumination.



**RUN TIME:** 24 hours to 10% of initial lumen output. See performance curve.




**ON/OFF:** Push button tail switch provides one handed momentary or constant "on" operation.

**BATTERIES:** Two (2) 1.5V alkaline batteries.

**FEATURES:**


C4® LED technology.  
Sealed construction.  
Intrinsically safe.  
IPX7 rated design; waterproof to 1 meter for 30 minutes.  
1 meter impact resistance tested.  
Push button tailswitch for momentary and constant on operation.  
Integrated clip.

**APPROVALS\*:**  Class I, II, Division 1, Groups A, B, C, D, E, F, G; Class III; T-Class: T4 (approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)



Permissible Flashlight. Approval No. 20-A140002-0.  
Tested for Intrinsic Safety in Methane-Air mixtures only.  
(approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)



II 1G Ex ia IIC T3/T4 Ga (approved for use with Duracell MN1500 (T3) and Rayovac NO.815 (T4) BASEEFA 14ATEX0072; IECEx BAS 14.0034

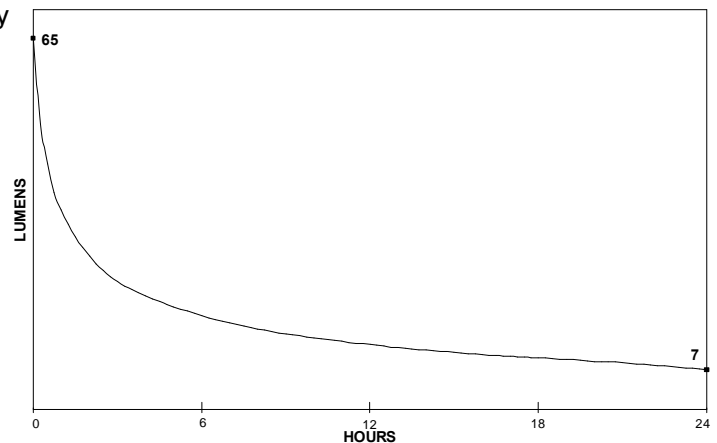


Meets applicable European Community Directives.

**WARRANTY:** Streamlight's Limited Lifetime Warranty

**OPTIONAL ACCESSORIES:**

Helmet Mounts, Safety Wands, Holster

**PERFORMANCE CURVE**


\* See product for specific ratings.  
All performance claims tested to ANSI/NEMA FL1-2009 Standard  
Issued: 05/08/2014